

Environmental Product Declaration | Ternium steel rebar manufactured from iron ore



Ternium steel rebar manufactured from iron ore

Environmental Product Declaration
In accordance with ISO 14025:2006 y EN 15804:2012+A2:2019/AC:2021

Programme:	The International EPD System www.environdec.com
Programme operator:	EPD International AB EPD Latin America
EPD registration number:	EPD-IES-0000701:001 (S-P-00701)
Issue date:	2018-05-25
Version date:	2025-06-13
Validity date:	2030-06-13
Geographical scope:	Mexico



An EPD may be updated or depublished if conditions change. To find the latest version of the EPD and to confirm its validity, see www.environdec.com

Content

1. Information about EPD owner	4
2. General information	5
3. Product information	7
4. Content declaration	9
5. Distribution packaging	9
6. Biogenic Carbon Content Information	9
7. LCA Information	10
7.1 Declared unit	10
7.2 System boundary	10
7.3 Description of information modules	13
7.4 Description of the manufacturing process	14
7.5 Assumptions	15
7.6 Cut off criteria	16
7.7 Allocation	16
7.8 Time representativeness	16
7.9 Characterisation methods	17
8. Environmental performance	17
8.1 Potential environmental impact	20
8.1.1 Global Warming Potential (GWP-GHG)	21
8.2 Use of resources	22
8.3 Other indicators describing waste categories	23
9. Differences between EPD versions	24
10. Verification and registration	25
11. Additional Environmental Information	26
12. Contact information	27
13. References	28



This EPD was prepared in conformity with the international standard ISO 14025:2006 and EN15804:2012+A2:2019/AC:2021 Sustainability of Construction Works.

The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but published in different EPD programmes, may not be comparable if they do not comply with the Product Category Rules (PCR) “Construction Product” and the EN 15804:2012+A2:2019/AC:2021 Sustainability of Construction Works – Environmental Product Declarations - Core rules for the product category of construction products. The Central Product Classification is CPC 4124: Bars and rods, hot rolled, of iron or steel.

For two EPDs to be comparable, they shall be based on the same PCR (including the same first-digit version number) or be based on fully aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have identical scope in terms of included life-cycle stages (unless the excluded life-cycle stage is demonstrated to be insignificant); apply identical impact assessment methods (including the same version of characterisation factors); and be valid at the time of comparison.

1. Information about EPD owner

Ternium is a leading company in Latin America that manufactures and processes a broad range of steel products using the most advanced technology. The company provides customers that operate in such diverse and essential steel consuming industries, such as construction, automotive and energy, as well as manufacturers of heavy and agricultural machinery, household appliances and packaging, among others.

Ternium and its subsidiaries have 18 productive centers in Argentina, Brazil, Colombia, Guatemala, Mexico, and the United States. It is also part of the controlling group of Usiminas, a leading steelmaker of the Brazilian market.

Ternium supplies with high quality steel all the main regional markets and it also promotes the development of its customers from the metallurgical industry. The company's distinctive position is a result of its highly integrated production procedure. Its facilities feature the whole manufacturing process of steelmaking, from the mining of iron ore to the production of high value-added products. With a yearly achievable production capacity of 15.4 million tons, Ternium's shares are listed and traded on the New York Stock Exchange.



Company Information

Ternium México S.A. de C.V.
Km 108 Autopista Mexico Puebla, San Miguel Xoxtla,
Puebla C.P. 72620
mx.ternium.com

Contact Information

Contact person:
Lucia Betanzos: lbetanzo@ternium.com.mx
Víctor Bernal: vbernalh@ternium.com.mx

2. General information

Product: Ternium steel rebar manufactured from iron ore	
Description of the construction product:	Steel rebars used to reinforce concrete in the construction industry. The surface of the rebar is corrugated to limit the relative longitudinal movement between the steel and the surrounding concrete.
Declared Unit:	1 metric ton of Steel rebar manufactured from iron ore, which is used as reinforcing steel for the construction industry.
Construction product identification:	Central Product Classification: CPC 4124 Bars and rods, hot rolled, of iron or steel.
Main product components:	100% low-alloyed steel manufactured using 78% iron ore (direct reduced iron) and 22% steel scrap as source of iron.
Life cycle stages not considered:	The modules: A4, A5, B1, B2, B3, B4, B5, B6, B7.
Statement content:	<p>This environmental product declaration is based on information modules that do not cover aspects of construction stage and use. It contains detailed information on the stage of input materials used for the generation of raw material and central process, modules A1, A2, A3, approximations of scenarios C1, C2, C3, C4 and D based on national statistics.</p> <ul style="list-style-type: none"> • Product definition. • Content declaration. • Declared Unit. • System boundary. • Environmental performance. • Evidence and verifications.
Comparability of EPD of construction products:	<p>a. EPD of construction products may not be comparable if they do not comply with EN 15804:2012+A2:2019/AC:2021</p> <p>b. Environmental product declarations within the same product category from different programs may not be comparable.</p>
For more information consult:	mx.ternium.com
Sites for which this EPD is representative:	Manufacturing Plants Industrial Center Km 108 Autopista México - Puebla San Miguel Xoxtla (72620) Puebla (+52) 222 372-3513
Intended Public:	B2B (Business to Business)

2. General information

Programme Information

Programme:	The International EPD System
Address:	EPD International AB, Box 210 60, SE-100 31 Stockholm, Sweden
Website:	www.environdec.com
Email:	support@environdec.com

Accountabilities for PCR, LCA and independent, third-party verification

Product Category Rules (PCR)

CEN standard EN 15804 serves as the core Product Category Rules (PCR)

Product category rules (PCR): 2019:14 Construction products. Version 1.3.4 published April 30, 2024.
Central Product Classification: CPC 4124 Bars and rods, hot rolled, of iron or steel.

PCR review was conducted by: The Technical Committee of the International EPD System. See www.environdec.com for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact

Life cycle assessment (LCA)

LCA accountability: CASOSTENIBLE S.A.S.

Third-party verification

Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:

☒ EPD verification through an individual EPD verification

Third-party verifier: Ruben Carnerero, IK Ingeniería SL

Approved by: The International EPD System

EPD Process Certification involves an accredited certification body certifying and periodically auditing the EPD process and conducting external and independent verification of EPDs that are regularly published. More information can be found in the General Programme Instructions on www.envrondec.com. International EPD System

Procedure for follow-up of data during EPD validity involves third-party verifier

☒ Yes

☐ No

3. Product information

Steel rebar are used to reinforce concrete in the construction industry. The surface of the rebar is corrugated to limit the relative longitudinal movement between the steel and the surrounding concrete. Steel reinforcing bar produced by Ternium Largos Puebla Works in San Miguel Xoxtla Puebla, is produced using iron ore as the main source of iron.

The product is manufactured according to Mexican standard NMX-B-506-CANACERO-2019 and U.S. standard ASTM A615/A615M-16. The characteristics of steel reinforcing bars produced by Ternium México are provided in the following tables.



Table 1. Physical properties of Steel rebar manufactured from iron ore - Masses and dimensions.

Masses and dimensions					
Product	Designation number	Nominal Diameter mm	Cross sectional area mm ²	Perimeter mm	Nominal mass kg/m
Ternium Steel rebar manufactured from iron ore	2.5	7.9	49	24.8	0.384
	3	9.5	71	29.8	0.560
	4	12.7	127	39.9	0.994
	5	15.9	198	50.0	1.552
	6	19.05	285	60.0	2.235
	8	25.4	507	79.8	3.973
	10	31.75	794	99.9	6.225
	12	38.1	1140	119.7	8.938

Table 2. Physical properties of Steel rebar manufactured from iron ore - Bending requirements.

Bending requirements	
Designation number	Mandrel diameter for bending test Grade 42
2.5	3.5 d
3	
4	
5	
6	5d
8	5d
10	7d
12	8d


Table 3. Physical properties of Steel rebar manufactured from iron ore - Corrugations and rib requirements.

Corrugations and rib requirements				
Ternium Grade	Designation number	Corrugation height mm	Rib wire rod width mm	Rib spacing mm
		min	max	max
NMX-B-506-CANACERO-2019-R42	2.5	0.3	3.0	5.6
	3	0.4	3.6	6.7
	4	0.5	4.9	8.9
	5	0.7	6.1	11.1
	6	1.0	7.3	13.3
	8	1.3	9.7	17.8
	10	1.6	12.2	22.3
	12	1.9	14.6	26.7

Table 4. Physical properties of Steel rebar manufactured from iron ore - Mechanical properties.

Mechanical properties				
Ternium Grade	Designation number	Tensile strength in kg/mm ²	Yield stress in kg/mm ²	Elongation
		min	min	min
NMX-B-506-CANACERO-2019-R42	2.5	63.0	42.0	9
	3			
	4			
	5			
	6			8
	8			
	10			
	12			

Figure 1. Nomenclature of Steel rebar manufactured from iron ore.

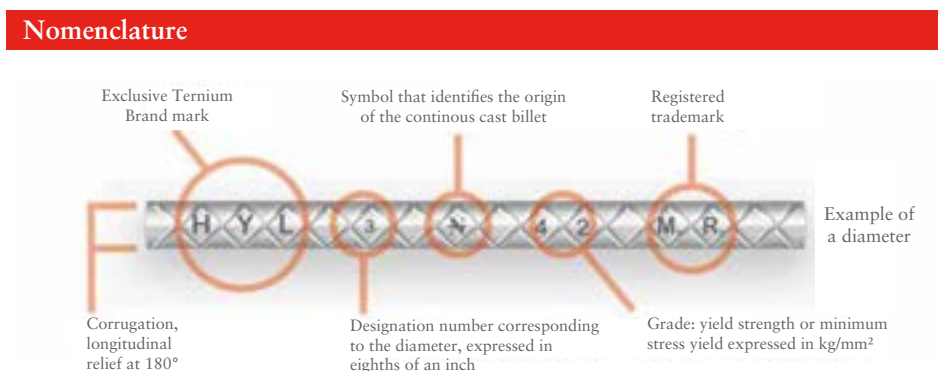

Name of manufacturer: Ternium México S.A. de C.V.

Location of the production site: Industrial Center km 108 Autopista México - Puebla San Miguel de Xoxtla (72620)

Central Product Classification: CPC 4124 Bars and rods, hot rolled, of iron or steel

4. Content declaration

A list of materials and chemical substances including information about their hazardous properties is provided next: Steel rebar manufactured in the Largos Puebla Plant of Ternium México uses 78% iron ore (direct reduced iron) and 22% steel scrap as source of iron.

Table 5. Composition of Steel rebar manufactured from iron ore by Ternium México.

Product components	Weight (kg)	Weight (%)	Post-Consumer recycled material (%)	Biogenic material (kg)	Biogenic material (kg C/product)
Iron ore and ferroalloys	780	78	0	0	0
Steel Scrap	220	22	100	0	0

5. Distribution packaging

Table 6. Content declaration of packaging of Steel rebar from iron ore manufactured by Ternium México.

Material	Weight (kg)	Weight, -% (versus the product)	Biogenic material, kgC / product of declared unit
Wire	2	0.2%	0
Plate	0.01	<0.01%	0
Label	<0.01	<0.01%	0
Total	2	0.2%	0

6. Biogenic Carbon Content Information

Steel rebar manufactured from iron ore does not contain biogenic carbon. Biogenic carbon from packaging and products was excluded from the system, as it represents less than 5% by mass (“2019:14 Construction Products, Version 1.3.4”).

7. LCA Information

Environmental potential impacts were calculated in accordance with EN 15804:2012+A2:2019/AC:2021 sustainability of construction works and PCR 2019:14 Construction products Version 1.3.4. This EPD is in accordance with ISO 14025:2006.

Environmental potential impacts were calculated through Life Cycle Assessment (LCA) methodology conformity to ISO 14040:2006 and ISO 14044:2006. An external third-party verification process of the EPD was conducted according to General Programme Instructions from the International EPD® System Version 4.0. Verification includes a documental review and a validation of both the underlying LCA study and documents describing additional environmental information that justify data provided in the EPD.

7.1 Declared unit

1 metric ton of Steel rebar manufactured from iron ore in 2022 by Ternium México.

7.2 System boundary

The potential environmental impacts were calculated through Life Cycle Assessment (LCA) methodology of Steel rebar manufactured from iron ore ISO 14040:2006 and ISO 14044:2006. This study went through a critical review process in accordance with ISO / TS 14071: 2014.

According to EN 15804:2012+A2:2019/AC:2021 section 5.2 the following type of EPD is “cradle to gate” with modules C1-C4 and module D (A1-A3 +C+D). This EPD is based on information upstream processes and core processes, modules A1 to A3, and approximations of scenarios C1, C2, C3, C4, and D based on construction sector statistics in Mexico (see Table 7).

Does not include A4-A5 Construction stage and B Usage stage.

Infrastructure and capital goods are excluded from the system boundaries, in accordance with PCR 2019:14, as they are not considered to have a significant environmental impact.

7. LCA Information

Table 7. System boundary of Steel rebar manufactured from iron ore.

Life cycle stage	Information about the modules contained in the stages	EPD			
		Cradle-to-gate with modules C1-C4 and module D	Cradle-to-gate with modules C1-C4, module D and optional modules	From cradle to grave and module D	EPD construction services: Cradle to door with modules A1-A5 and optional modules
A1-A3 product stage	A1) Raw material procurement				
	A2) Transport	Mandatory	Mandatory	Mandatory	Mandatory
	A3) Manufacture				
A4-A5 Construction stage	A4) Transport	-	Optional for goods	Mandatory	Mandatory
	A5) Construction / installation		Required for services		
B Usage stage	B1) Use				
	B2) Maintenance				
	B3) Reparation				
	B4) Replacement	-	Optional	Mandatory	Mandatory
	B5) Remodeling				
	B6) Operational energy use				
	B7) Operational water use				
C End of life stage	C1) Deconstruction, demolition				
	C2) Transport	Mandatory	Mandatory	Mandatory	Optional
	C3) Waste processing				
	C4) Final disposal				
D Benefits and charges beyond the system limit	D) Reuse, recycling or energy recovery potential.	Mandatory	Mandatory	Mandatory	-

7. LCA Information

Table 8. Description of the modules included in this EPD.

	Product stage			Construction process phase		Usage stage						End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction facility	Use	Maintenance	Repair	Restoration	Operational energy use	Operational use of water	Demolition / Deconstruction	Transport	Waste Processing	Disposal	Reuse - Recovery - Recycling - Potential
Module	A1	A2	A3	A4	A5	B1	B2	B4	B5	B6	B7	C1	C2	C3	C4	D
Declared modules	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
Geography	MX	MX	MX	ND	ND	ND	ND	ND	ND	ND	ND	MX	MX	MX	MX	MX
Specific data used	>90%			-	-	-	-	-	-	-	-	-	-	-	-	-
Product variation	0%			-	-	-	-	-	-	-	-	-	-	-	-	-
Site variation	0%			-	-	-	-	-	-	-	-	-	-	-	-	-

X = Declared module; ND = No declared module; NR = No reported; MX= Mexico

Geographical scope: Mexico

Summary of Data Quality Assessment






Data quality was assessed considering geographical, technical, and temporal representativeness, as well as precision, completeness, consistency, and data sources. For stages A1 and A2, consumption values and transport distances were provided directly by the manufacturer; however, selected generic datasets from the Ecoinvent 3.10 database (updated as of December 2024) were used and subsequently regionalized. Therefore, while the datasets are secondary, the quantities used reflect real, process-specific values. For stage A3, primary data was collected by Ternium at the Largos Puebla plant (Mexico) during 2022. The share of primary data used across modules A1-A3 is 91.9% (>90%). The data quality assessment followed the criteria set out in Annex E, Table E.1 of EN 15804:2012+A2:2019/AC:2021.

7. LCA Information

7.3. Description of information modules

In Table 9 the description of information modules is included.

Table 9. Description of information modules in this EPD.

				
A1) Raw materials	A2) Transportation	A3) Manufacturing	C) End of life	D) Benefits and charges beyond the system boundaries
<ul style="list-style-type: none"> • Production of other raw materials: ferroalloys, lime, carbon, graphite electrodes, calcium carbide. • Production of packaging materials for raw materials. • Generation and distribution of the electricity consumed in manufacturing. • Production and processing of natural gas used as fuel during the manufacturing process. • Steel scrap supply 	<ul style="list-style-type: none"> • Transportation of steel scrap. • Transportation of other raw materials. • Transportation of ancillary materials. • Internal transport. 	<ul style="list-style-type: none"> • Fresh water consumption. • Production and consumption of ancillary materials: chemicals for water treatment, lubricating oils and grease. • Waste generation and waste management processes. • Emissions to air and water. • Transportation of waste to the treatment and final disposal site. 	<ul style="list-style-type: none"> • De-construction, demolition, transport, waste processing, disposal. 	<ul style="list-style-type: none"> • Re-use • Recovery-Recycling-potential

7. LCA Information

7.4. Description of the manufacturing process

Product stage (modules A1, A2, A3).

This stage includes raw material acquisition, transportation, and the manufacturing process. It covers the production of steel rebar from iron ore, electricity generation, and fuel production for manufacturing activities. It also includes the transportation of raw materials to the manufacturing site, production of ancillary materials, freshwater consumption, as well as waste and emissions generated during the manufacturing process.

End of life stage (modules C1, C2, C3, C4).

This stage includes the deconstruction process, use of machinery, demolition hours, and fuel consumption during demolition. It also covers the transportation of waste to recycling facilities and sanitary landfills. According to the Latin American Steel Association (ALACERO, 2022), 98% of the deconstruction waste per metric ton of steel rebar is processed for recycling, while the remaining 2% is disposed of in construction and demolition waste sites.

Resource recovery stage (module D).

Avoided loads and benefits of stopping the production of mineral for steel are evaluated and Steel rebar with scrap steel.

Ternium México produces Steel rebar using 78% iron ore as the main raw material in the metal charge and 22% Steel scrap. The production process includes manufacture of sponge iron from the direct reduction of iron ore pellets, including steelmaking through an electric arc furnace, continuous casting and hot rolling. Each of these processes is carried out at the Puebla plant. Figure 2 shows a diagram of the production process of the Steel rebar manufactured from iron ore by Ternium México.

Direct Reduction

The process begins with the Direct Reduction of iron ore, where iron ore pellets are transformed into sponge iron (Direct Reduced Iron or DRI). This is achieved by removing oxygen from the pellets using a reducing gas composed mainly of hydrogen and carbon monoxide, produced through the reforming of natural gas. The result is a high-quality iron product with low residual elements, ensuring superior steel quality for further processing.

Electric Arc Furnace

The sponge iron, along with scrap, is then melted in the Electric Arc Furnace (EAF). Here, the raw materials are converted into liquid steel. The EAF operates with precise control to achieve the desired chemical composition and temperature. The liquid steel is further refined in a Ladle Furnace, where final adjustments are made to meet specific customer requirements.

Ladle Furnace

The liquid steel from the EAF is transferred to a Ladle Furnace for refining. Here, the steel's chemical composition is adjusted to meet specified requirements through the addition of ferroalloys. The Ladle Furnace also ensures that the steel reaches the optimal temperature for the next stage, significantly improving its quality and performance.

Continuous Casting

The refined liquid steel is transferred to the Continuous Casting process, where it is solidified into billets. The liquid steel is poured into a series of water-cooled copper molds, forming semi-finished products known as billets. These billets are then cut to specific lengths and prepared for the next stage of production.


Hot Rolling

The billets are heated in a reheating furnace and passed through a series of rolling stands in the Hot Rolling process. This reduces their cross-section and shapes them into steel rebar with the required dimensions and mechanical properties.

Finally, the rebar undergoes cutting to the required lengths and bundling for storage and shipment. The finished product is prepared for delivery, either as straight bars or coiled, depending on customer requirements.

7. LCA Information

Figure 2. Flow diagram of Steel rebar manufactured from iron ore process.

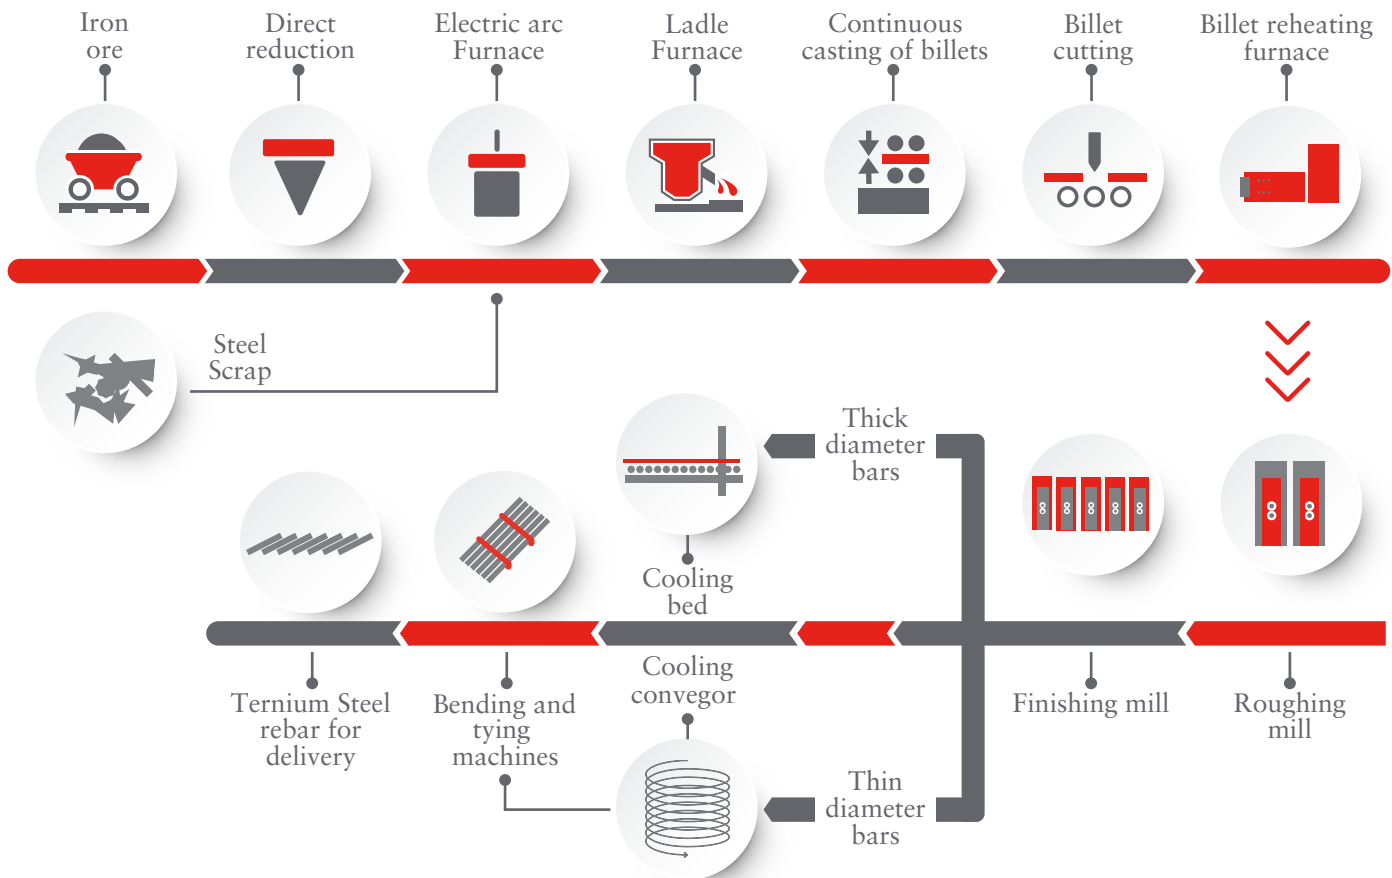

7.5. Assumptions

The assumption related to the Steel rebar manufactured from iron ore manufacturing process are presented below.

- For secondary data and when it was not possible to acquire direct information from the company, the Ecoinvent 3.10 life cycle databases, in their Cut-off version, were used.

The characteristics of the generic data used in this study from the Ecoinvent 3.10 database are presented below.

- They are representatives of the world average, excluding Europe (RoW).
- They represent technological equivalence to those used by Ternium México suppliers.
- The datasets used represent cradle-to-gate systems, thus respecting the technological limits of the complete system under study.

- For raw materials and inputs where the country of origin was known with certainty, a global database was used as the primary source of data. The energy matrix of the global database was regionalized by adjusting it to reflect the energy profile of the country of origin.

This LCA study and the resulting EPD were based on specific data for processes under Ternium México's control, while generic data were used for processes outside its influence. Generic data refers to inventories related to the production of raw materials. Additionally, generic data was employed for the manufacture of packaging materials, transportation methods, and waste treatment.

7. LCA Information

7.6. Cut off criteria

All flows of fuel, energy, materials and supplies necessary to produce Steel rebar manufactured from iron ore have been considered; materials that could be used in preventive or corrective maintenance of machinery and equipment were disregarded, as well as the use of uniforms and personal protective equipment or other auxiliary materials, leaving out textile impregnated with oils or plastics and the final disposal of these as hazardous waste.

7.7. Allocation

In this study, the first preferred allocation procedure was applied, as mentioned in the PCR (PCR, 2024), which constitutes the partition of the inputs and outputs of the system, reflecting the physical relationships between the product and each by product. The partition of inputs and outputs was based on a mass relationship, considering the quantity produced per year of each product or by product at the unit process level.

This procedure constitutes a conservative approach, because the products represent the largest proportion when analyzing the outputs (based on the mass produced) in each unit process evaluated. This procedure was used in the same way for material flows as for energy flows throughout the evaluated modules. Also, the performance and process involved in the manufacture of Steel rebar manufactured from iron ore were used in the assignment of the input and output flows of the LCI.

Table 10. By-product allocation for Steel rebar manufactured from iron ore.

Process	By-product	Allocation
Direct reduction	Carbon dioxide	4.91%
	Ore fines	0.10%
	Direct reduction sludge	2.60%
Steelmaking	Steel mill slag	12.84%
	Steel mill dust	1.59%
Hot rolling	Flake	0.7%

7.8. Time representativeness

Direct data obtained from Ternium México is representative for 2022.

7.9. Characterisation methods

The following table presents the characterisation methods used for each of the declared environmental performance indicators, including the corresponding sources and version.

Table 11. Characterisation methods for environmental performance indicators.

Characterisation method	Category
EN 15804. Version: EF 3.1, April 2024	Climate change - Total
	Climate change- Fossil
	Climate change - Biogenic
	Climate change - Land use and LU change
	Ozone depletion
	Acidification
	Photochemical ozone formation
	Eutrophication, freshwater
	Eutrophication, marine
	Eutrophication, terrestrial
	Resource use, fossils
	Resource use, minerals and metals
ReCiPe Midpoint (H). Version 1.1 2016 AWARE 2.0	Water use
IPCC GWP 100a. Version 1.03 2016	Climate change- GWP
Cummulative Energy Demmand. Version 1.12 2024	Use of renewable primary energy Non-renewable primary energy use
ReCiPe Midpoint (H). Version 1.1 2016	Use of fresh water (FW)
EDIP 2003. Versión 1.07 2018	Hazardous waste
	Non-hazardous waste
	Radioactive waste

8. Environmental performance

SimaPro 9.5 and Ecoinvent 3.10 were used for Life Cycle Impact Assessment. Potential impacts were calculated using the EN15804+A2 (adapted) V1.0 / EF 3.1 normalization and weighting set method (PRé-Sustainability, 2021).

8.1. Potencial environmental impact

The results of the LCIA for the basic categories of 1 metric ton of Steel rebar manufactured from iron ore are presented in Figure 3 and Table 15. The LCIA is shown with the reference substance corresponding to each impact category and the percentage contribution. All information modules are reported and valued separately. However, this EPD presents the full impact at all stages.

Electricity Impact

The electricity generation data in Mexico comes from the Ecoinvent 3.10 database and information from the National Center for Energy Control (CENACE), which is a decentralized public body whose purpose is to manage the Operational Control of the National Electric System in Mexico. With both references a dataset was created, named “Electricity, high voltage, 2023 {MX} | market for electricity, high voltage | Cut-off, U”, this dataset represents the most recent electricity Mexican grid by type of technology. But adjusts were required to reflect that Ternium México in 2022 also use Electricity from Independent Producers and this one has at least GWP lower emission factors.

Table 12. Mexican electricity grid.

Type of technology	Total
Deep geothermal	1%
Hard coal	4%
Hydro, run-of-river	6%
Natural gas, combined cycle power plant	59%
Natural gas, conventional power plant	9%
Nuclear, boiling water reactor	3%
Wind, 1-3MW turbine, onshore	5%
Photovoltaic, 570kWp open ground installation, multi-Si	5%
Ethanol production from sweet sorghum	<0%
Oil	2%
Natural gas, burned in gas turbine, for compressor station	6%
TOTAL	100%

As part of the requirements of the PCR, the climate impact as kg CO₂eq of the electricity used in the manufacturing process of Steel rebar manufactured from iron ore is reported in Table 13. This impact was calculated using the GWP-GHG indicator.

Table 13. Electricity Global Warming Potential (kg CO₂eq/kWh).

Type of electricity	Unit	Quantity
Weighted total of electrical energy sources	kg CO ₂ eq	4.00E-01

Global warming potential (GWP-GHG) of Scrap use

In accordance with the new PCR requirements, the Global Warming Potential (GWP-GHG) associated with the amount of scrap used in the production of 1 metric ton of steel rebar must be reported. The impact was calculated using the GWP-GHG indicator. And also apply in case of steel rebar from iron ore.


Table 14. Scrap use, Global Warming Potential (kg CO₂eq/ metric ton).

Impact Basic Category	Unit	Quantity
Global Warming Potential (GWP-GHG) of scrap use	kg CO ₂ eq	11.3E+00

8. Environmental performance

The EICV results for 1 metric ton of Steel rebar manufactured from iron ore are presented in Figure 3 and Table 15. The analysis shows that Module A1 (Raw material supply) is the main contributor to the overall environmental impacts, followed by Module A3 (Manufacturing) and Module A2 (Transportation).

Figure 3. A1-A3 Basic impact categories result of Steel rebar manufactured from iron ore.

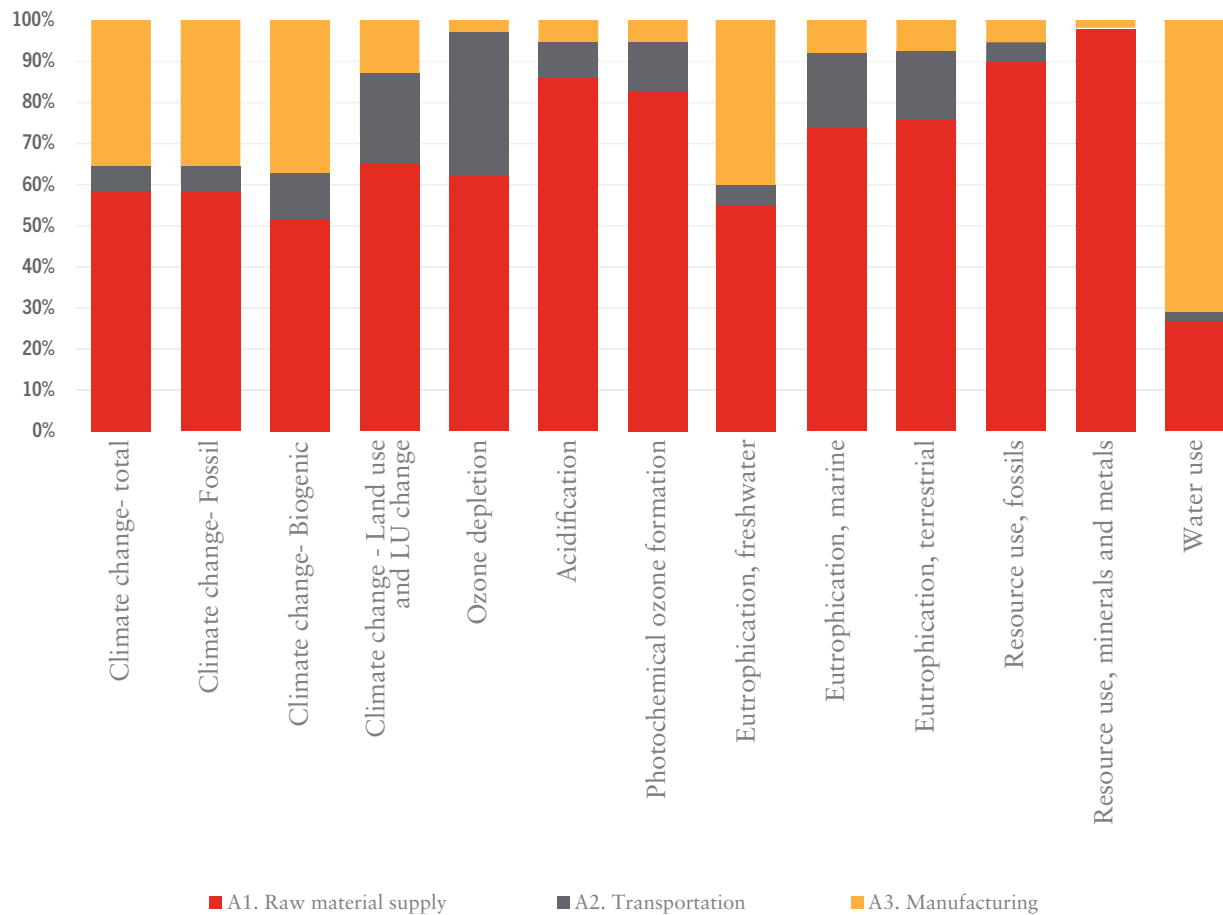

8. Environmental performance

Table 15. A1-A3 Basic impact categories result of Steel rebar manufactured from iron ore.

Basic impact categories	Unit	A1) Raw materials	A2) Transportation	A3) Manufacturing	Total
Climate change - Total	kg CO ₂ eq	7.72E+02	6.64E+01	4.62E+02	1.30E+03
	%	59.37%	5.11%	35.52%	100%
Climate change- Fossil	kg CO ₂ eq	7.72E+02	6.64E+01	4.62E+02	1.30E+03
	%	59.37%	5.11%	35.52%	100%
Climate change - Biogenic	kg CO ₂ eq	2.94E-01	2.82E-02	1.93E-01	5.15E-01
	%	57.12%	5.48%	37.40%	100%
Climate change - Land use and LU change	kg CO ₂ eq	4.22E-02	1.28E-02	9.33E-03	6.44E-02
	%	65.63%	19.87%	14.50%	100%
Ozone depletion	kg CFC11 sq.	4.21E-05	2.44E-05	1.81E-06	6.84E-05
	%	61.62%	35.73%	2.65%	100%
Acidification	mol H ⁺ eq	6.25E+00	4.64E-01	4.85E-01	7.20E+00
	%	86.81%	6.45%	6.75%	100%
Photochemical ozone formation	kg NMVOC eq	4.49E+00	6.48E-01	3.88E-01	5.52E+00
	%	81.27%	11.72%	7.01%	100%
Eutrophication, freshwater	kg P eq	4.32E-03	4.32E-04	3.05E-03	7.80E-03
	%	55.39%	5.54%	39.07%	100%
Eutrophication, freshwater	kg PO ₄ ³⁻ eq	1.33E-02	1.33E-03	9.35E-03	2.39E-02
	%	55.39%	5.54%	39.07%	100%
Eutrophication, marine	kg N eq	8.74E-01	2.00E-01	9.93E-02	1.17E+00
	%	74.49%	17.04%	8.46%	100%
Eutrophication, terrestrial	mol N eq	9.98E+00	2.19E+00	1.09E+00	1.33E+01
	%	75.24%	16.52%	8.24%	100%
Resource use, fossils	MJ	2.41E+04	8.27E+02	1.42E+03	2.64E+04
	%	91.47%	3.14%	5.39%	100%
Resource use, minerals and metals	kg Sb eq	2.47E-03	2.00E-06	2.90E-05	2.50E-03
	%	98.76%	0.08%	1.16%	100%
Water use	m ³ deprived	1.58E+01	8.85E-01	4.19E+01	5.86E+01
	%	26.94%	1.51%	71.55%	100%

Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.
 Disclaimer: The results of the end-of-life stage (module C) should be considered when using the results of the production stage (modules A1-A3)
 The environmental performance results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

8. Environmental performance

The results of stages C1-C4 are presented next as well as stage D.

Table 16. Impact assessment of end-of-life scenario.

Basic impact categories	Unit	C1) Deconstruction	C2) Waste transport	C3) Waste treatment	C4) Waste disposal	D) Benefits and charges beyond the system boundary
Climate change- GWP GHG	kg CO ₂ eq	1.16E+00	1.55E+01	0.00E+00	5.44E-02	-8.78E+01
Climate change- total	kg CO ₂ eq	1.16E+00	1.54E+01	0.00E+00	5.43E-02	-8.78E+01
Climate change- Fossil	kg CO ₂ eq	1.16E+00	1.54E+01	0.00E+00	5.43E-02	-8.78E+01
Climate change- Biogenic	kg CO ₂ eq	9.79E-05	1.82E-03	0.00E+00	1.84E-05	7.99E-03
Climate change - Land use and LU change	kg CO ₂ eq	2.47E-05	4.51E-04	0.00E+00	2.22E-06	-3.12E-03
Ozone depletion	kg CFC11 eq	1.49E-08	2.07E-07	0.00E+00	8.05E-10	-1.31E-06
Acidification	mol H ⁺ eq	9.23E-04	4.19E-02	0.00E+00	4.93E-04	-2.82E+00
Photochemical ozone formation	kg NMVOC eq	1.89E-03	6.25E-02	0.00E+00	7.43E-04	-1.06E+00
Eutrophication, freshwater	kg P eq	6.56E-07	3.82E-05	0.00E+00	1.95E-07	-3.04E-04
Eutrophication, freshwater	kg PO ₄ ³⁻ eq	2.01E-06	1.17E-04	0.00E+00	6.00E-07	-9.35E-04
Eutrophication, marine	kg N eq	1.17E-04	1.52E-02	0.00E+00	2.24E-04	-3.21E-01
Eutrophication, terrestrial	mol N eq	1.25E-03	1.67E-01	0.00E+00	2.46E-03	-3.74E+00
Resource use, fossils	MJ	1.46E+01	2.06E+02	0.00E+00	6.98E-01	-9.55E+02
Resource use, minerals and metals	kg Sb eq	3.78E-08	9.16E-07	0.00E+00	2.15E-09	-4.83E-05
Water use	m ³ H ₂ O eq	2.73E-03	1.00E-01	0.00E+00	3.49E-04	-6.98E+00

Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

The environmental performance results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

8. Environmental performance

8.1.1 Global Warming Potential (GWP-GHG)

Table 17 shows the results of the Global Warming Potential of 1 metric ton of Steel rebar manufactured from iron ore evaluated with the IPCC GWP100 method for modules A1-A3 and Table 18 for modules C1-C4 and D.

Table 17. A1-A3. Climate Impact (GWP-GHG) of Steel rebar manufactured from iron ore.

Impact category	Unit	A1) Raw materials	A2) Transportation	A3) Manufacturing	Total
Climate change- GWP	kg CO ₂ eq	7.74E+02	6.66E+01	4.62E+02	1.30E+03

GWP-GHG = total Global Warming Potential, excluding biogenic carbon, following IPCC AR5 (2013) methodology. This indicator includes all greenhouse gases covered by GWP-total, but excludes biogenic carbon dioxide consumption and biogenic carbon emissions or storage in the product. Therefore, this indicator is almost equivalent to the original GWP indicator defined in EN 15804:2012+A1:2013. The modeling was performed according to IPCC 2013 GWP 100a, version 1.02 (PCR 2019:14, GPI, IPCC AR5).

Table 18. C1-C4 and D. Climate Impact (GWP-GHG) of Steel rebar manufactured from iron ore.

Impact category	Unit	C1) Deconstruction	C2) Waste transport	C3) Waste treatment	C4) Waste disposal	D) Benefits and charges beyond the system boundary
Climate change- GWP	kg CO ₂ eq	1.16E+00	1.55E+01	0.00E+00	5.44E-02	-8.78E+01

GWP-GHG = total Global Warming Potential, excluding biogenic carbon, following IPCC AR5 (2013) methodology. This indicator includes all greenhouse gases covered by GWP-total, but excludes biogenic carbon dioxide consumption and biogenic carbon emissions or storage in the product. Therefore, this indicator is almost equivalent to the original GWP indicator defined in EN 15804:2012+A1:2013. The modeling was performed according to IPCC 2013 GWP 100a, version 1.02 (PCR 2019:14, GPI, IPCC AR5).

8. Environmental performance

8.2 Use of resources

Parameters describing resource use were evaluated with the Cumulated Energy Demand method version 1.01 (Frischknecht et al. 2007) adjusted with option B of Annex 3 of the PCR 2019:14 Construction products.

Version 1.3.4, except for the indicator of use of net fresh water that was evaluated with Recipe 2016 Midpoint (H) version 1.00 (Huijbregts et al. 2017). The detailed description of the use of resources is provided in Table 19.

Table 19. Use of resources parameters of 1 metric ton of Steel rebar manufactured from iron ore.

Use of resources parameters	Units	Total A1-A3	C1) Deconstruction	C2) Waste transport	C3) Waste treatment	C4) Waste disposal	D) Benefits and charges beyond the system boundary
Use of renewable primary energy excluding renewable primary energy resources used as feedstock (PERE)	MJ	1.02E+03	1.91E-02	3.36E-01	0.00E+00	3.31E-03	-6.76E+01
Use of renewable primary energy as raw material (PERM)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total use of renewable primary energy (primary energy and primary energy resources used as feedstock) (PERT)	MJ	1.02E+03	1.91E-02	3.36E-01	0.00E+00	3.31E-03	-6.76E+01
Non-renewable primary energy use excluding renewable primary energy resources used as feedstock (PENRE)	MJ	2.91E+04	1.55E+01	2.19E+02	0.00E+00	7.42E-01	-1.04E+03
Use of non-renewable primary energy as raw material (PENRM)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total use of non-renewable primary energy (primary energy and primary energy resources used as raw materials) (PENRT)	MJ	2.91E+04	1.55E+01	2.19E+02	0.00E+00	7.42E-01	-1.04E+03
Use of secondary materials (SM)	kg	2.90E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of secondary renewable fuels (RSF)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of secondary non-renewable fuels (NRSF)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of fresh water (FW)	m ³	7.08E+00	1.89E-04	6.93E-03	0.00E+00	2.42E-05	-4.83E-01

These energy parameters are evaluated with the Cumulated Energy Demand method version 1.09 (Frischknecht Rolf, 2007) and adjusted with option B of Annex 3 of the PCR 2019:14 Construction products. Version 1.3.4 published on April 30, 2024 (PCR, 2024). Water use was evaluated with ReCiPe 2016 Midpoint (H) version 1.08 (Huijbregts, et al., 2017).

8. Environmental performance

8.3. Others indicators describing waste categories

Environmental indicators describing waste generation were obtained from LCI except for background information which has been calculated using

EDIP 2003 method (Hauschild and Potting, 2005). Environmental parameters describing waste generation are provided below:

Table 20. Other indicators describing waste categories of Steel rebar manufactured from iron ore.

Output parameter	Unit	A1-A3	C1) Deconstruction	C2) Waste transport	C3) Waste treatment	C4) Waste disposal	D) Benefits and charges beyond the system boundary
Hazardous waste*	kg	3.12E-01	1.00E-04	1.41E-03	0.00E+00	4.62E-06	-1.01E-01
Non-hazardous waste**	kg	2.27E+00	3.51E-04	8.83E-03	0.00E+00	2.00E+01	-9.85E-02
Radioactive waste***	kg	7.65E-03	4.58E-07	7.42E-06	0.00E+00	4.27E-08	-5.57E-04

* Direct indicators from Ternium México process data.

** Indirect indicators are not related to Ternium México's operations but to the generation during the processes of obtaining auxiliary inputs.

*** No radioactive waste is produced during Ternium México operation.

Table 21. Other indicators describing material and energy output flows categories of Steel rebar manufactured from iron ore.

Output parameter	Unit	A1-A3	C1) Deconstruction	C2) Waste transport	C3) Waste treatment	C4) Waste disposal	D) Benefits and charges beyond the system
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling*	kg	0.00E+00	0.00E+00	0.00E+00	9.80E+02	0.00E+00	0.00E+00
Materials for energy recovery*	kg	1.58E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported electricity	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported heat	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

* Direct indicators from Ternium México process data.

For more information about Steel rebar manufactured from iron ore, contact the EPD owner who has LCA study of these products.

All information modules are reported separately. However, the total impact across all stages is also presented.

Parameters describing environmental potential impacts were calculated using EN 15804:2012+A2:2019/AC:2021 Adapted version 1 (https://eplca.jrc.ec.europa.eu/permalink/EN_15804.zip) as implemented in SimaPro 9.5.


9. Differences between EPD versions

This Environmental Product Declaration (EPD) is an update of the original version of the EPD titled Steel rebar manufactured from iron ore, originally published on May 25, 2018, in accordance with PCR 2012:01 Construction products and construction services, Version 2.2 (2017-05-30). The previous EPD has now reached the end of its validity period.

The production process has not undergone significant changes; the same steelmaking route and product specifications are maintained. Only minor modifications have been implemented to improve operational efficiency, without affecting the representativeness of the modeled system. This updated EPD complies with the requirements of the EN 15804:2012+A2:2019/AC:2021 standard and the Construction Products PCR 2019:14, Version 1.3.4.

10. Verification and registration

CEN STANDARD EN 15804 SERVED AS THE CORE PCR

Programme:	International EPD® System www.environdec.com EPD registered through the fully aligned regional programme/hub: EPD Latin America www.epd-americalatina.com	
Programme operator:	EPD International AB Box 210 60 SE-100 31 Stockholm, Sweden E-mail: info@environdec.com EPD Latin America Chile: Alonso de Ercilla 2996, Ñuñoa, Santiago Chile. Mexico: Bosques de Bohemia 2 No. 9, Bosques del Lago. Cuaautitlan Izcalli, Estado de Mexico, Mexico.	
EPD registration number:	EPD-IES-0000701:001 (S-P-00701)	
Date of publication (issue):	2018-05-25	
Date of version:	2025-06-13	
Date of validity:	2030-06-13	
Reference year of data:	2022	
Geographical scope:	Mexico	
Product group classification:	UN CPC 4124 Bars and rods, hot rolled, of iron or steel	
PCR:	PCR 2019:14 construction products, Version 1.3.4 (EN 18504:2012+A2:2019/AC:2021)	
PCR review was conducted by:	Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact .	
Independent verification of the declaration data, according to ISO 14025:2006.	<input type="checkbox"/> EPD process certification (Internal) <input checked="" type="checkbox"/> EPD verification (External)	
External third-party verifier and critical reviewer of the LCA:	Ruben Carnerero Approved EPD verifier r.carnerero@ik-ingenieria.com	
Accredited or approved by:	The International EPD® System	
Procedure for follow-up of data during EPD validity involves third-party verifier:	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	

11. Additional Environmental Information

Environment

The Environmental Management System of the Ternium Plants that participate in the manufacture are certified under standard ISO 14001:2015

Sustainability

Towards sustainability and environmental protection Ternium manufactures 100% recyclable products, with the highest quality and minimizing environmental impact. Recycling is an important part of the company's production process, as well as ensuring a long-term healthy link with the communities neighboring the production centers.

Ternium is deeply committed to sustainable development, so its actions are guided by an Environmental and Energy Policy that involves employees, shareholders, suppliers, customers, and communities. The company has a Management System that foresees procedures, reviews and specific records for the proper operation, maintenance and control of facilities, as well as for the handling of substances.

Active Participation

Ternium reports, since 2005, CO₂ emissions to the World Steel Association. This garnered the recognition of the "Climate Action Member" program. Additionally, Ternium subscribed to the report on sustainability indicators and reports on energy consumption and personnel training. In addition, Ternium also garnered for 7 consecutive years the recognition of Sustainability Champion by the World Steel Association.

In addition, the company is part of different groups that are concerned about environmental issues, mainly the World Business Council for Sustainable Development (National Chapters), the Latin American Steel Association (Alacero), World Steel Association and various work committees in several industrial associations. In Mexico, it participates through the commissions related to environmental issues and energy saving of the National Chamber of Iron and Steel (CANACERO), the Mining Chamber of Mexico (CAMIMEX) and the Environmental Protection Institute of Nuevo León (IPA-NL).

12. Contact information

EPD Owner:



Ternium México S.A. de C.V.
Avenida Universidad 992
Colonia Cuauhtémoc,
C.P. 66450
San Nicolás de Los Garza.
Nuevo León, México.
mx.ternium.com

Contact person:
Lucia Betanzos:
Ibetanzo@ternium.com.mx
Víctor Bernal:
vbernalh@ternium.com.mx

LCA Author



Casostenible S.A.S
Km 2 Vía Chía - Cajicá,
Hacienda Fontanar Ciprés
www.casostenible.com
Bogotá D.C.,
Colombia.

LCA Study:
Life Cycle Impact
Assessment
Steel rebar manufactured
from iron ore
Ternium México
(Report 2024)

LCA Authors:
Ruge V, Bolaños A.

Contact person:
Felipe Restrepo
proyectos@casostenible.com

Programme Operator



EPD International AB

Box 210 60, SE-100 31,
Stockholm, Sweden.
www.environdec.com
info@environdec.com

EPD registered through the
fully aligned regional
programme/hub:



EPD Latin America
www.epd-americalatina.com

Chile:
Alonso de Ercilla 2996,
Ñuñoa, Santiago Chile.

México:
Bosques de Bohemia 2
No.9, Bosques del Lago.
Cuautitlán Izcalli,
Estado de México,
México.
C.P. 54766

13. References

- ALACERO. (2022). Asociación Latinoamericana del Acero (ALACERO) El acero es el único material que puede ser reciclado ilimitadamente al 100%. Obtenido de <https://www.alacero.org/noticias/el-acero-es-el-unico-material-al-que-puede-ser-reciclado-ilimitadamente-al-100>
- Boulay AM, Bare J, Benini L, Berger M, Lathuillière MJ, Manzardo A, Margni M, Motoshita M, Núñez M, Valerie-Pastor A, Ridoutt B, Oki T, Worbe S, Pöster S (2018) The WULCA consensus characterization model for water scarcity footprints: assessing impacts of water consumption based on available water remaining (AWARE). The International Journal of Life Cycle Assessment. Volume 23, Issue 2, pp 368–378. <https://doi.org/10.1007/s11367-017-1333-8>
- EN 15804:2012+A2:2019/AC:2021. Sustainability of construction works. Environmental products declarations. Core rules for the product category of construction products.
- Frischknecht R., Jungbluth N., et.al. (2003). Implementation of Life Cycle Impact Assessment Methods. Final report ecoinvent 2000, Swiss Centre for LCI. Duebendorf, CH, www.ecoinvent.ch
- General Programme Instructions for The International EPD System. Version 4.0.0 Published on 2021-03-29.
- GPI 5.0. (2024). General Programme Instructions for the International EPD System. EPD System. Available on <https://www.environdec.com/>
- Maya Rojas, O. M. (2014). Análisis técnico económico para el uso de alternativas de demolición en el edificio no. 19 de la PUJ.
- Hauschild M, Potting J (2005) Spatial differentiation in Life Cycle impact assessment - The EDIP2003 methodology. Institute for Product Development Technical University of Denmark.
- Huijbregts MAJ, Steinmann ZJN, Elshout PMF, Stam G, Verones F, Vieira M, Zijp M, Hollander A, van Zelm R. ReCiPe2016: a harmonised life cycle impact assessment method at midpoint and endpoint level. International Journal on Life Cycle Assessment Volume 22 Issue 2. pp 138-147. <https://doi.org/10.1007/s11367-016-1246-y>
- IMNC (2008) NMX-SAA-14025-IMNC-2008. Gestión ambiental-etiquetas y declaraciones ambientales-declaraciones ambientales tipo III-principios y procedimientos.
- IMNC (2008) NMX-SAA-14040 Gestión ambiental - Análisis de ciclo de vida - Principios y marco de referencia. México, D.F.:
- IMNC. ISO 14020:2022. Environmental statements and programmes for products — Principles and general requirements. SO 14025: 2006. Environmental labels and declarations — Type III environmental declarations — Principles and procedures.
- ISO 14025: 2006. Environmental labels and declarations — Type III environmental declarations — Principles and procedures.
- PCR 2019:14 Construction Products V 1.3.4. (2024-04-30). EPD System. Available on <https://www.environdec.com/>
- Ternium México. (2018). Steel reinforcing bar manufactured from iron ore. Environmental Product Declaration. Available on <https://www.environdec.com/library/epd701>

Ternium México ("Ternium") provides this information as a support for the use of the products, thereby it cannot be held responsible for any misuse given to the products; that is why it should be seek advise from a specialist at your own expense, account and risk, who verifies the applicability of the products. Ternium, under no circumstance will be responsible for the installation and/or accessories used for the installation of the commercialized products.

Ternium shall not be liable for any warranties, express or implied. By making this information available. Ternium is not providing professional services and does not assume any duties or responsibilities with respect to any person who uses such information. Likewise, Ternium will not be liable for any complaint, claim, injury, loss, expense, cost, legal fees or any liability that arises from or is related to the use of the information contained in this publication, whether or not such complaint, claim, injury, loss, expense, cost, legal fees or liability results directly or indirectly from any action or omission of Ternium. Any party using the information contained in this manual assumes all liability arising from such use.

Since there are risks associated with the handling, installation or use of steel and its accessories, we recommend that the parties involved in the handling, installation or use review all applicable safety sheets of the manufacturer's material, any rules and regulations from the Ministry of Labor and Social Welfare and any other governmental agencies that have jurisdiction over such handling, installation or use, as well as any other relevant publications of construction practices.

Reserved rights; the content of this document may not be reproduced or used in whole or in part in any form, electronically, photocopy or otherwise without the permission of Ternium México S.A. de C.V.

www.ternium.com.mx